

CD 3 TS 2


ROUGHING-CEMENTING MACHINES



Roughing-cementing machine for the shoe bottom. The two operations are carried out simultaneously thanks to two working heads, operating on two lasts carrier carts.

ATOM



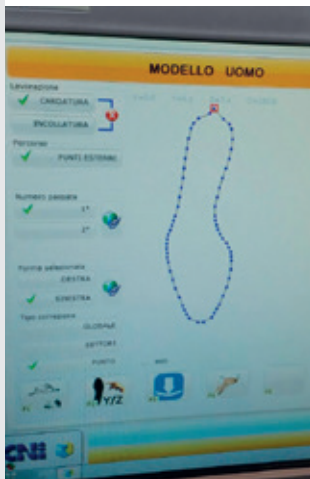

SELF-LEARNING

Self-learning of the shoe profile by pen, and automatic calculation of the inclination of the tools, all conveniently managed by touchscreen.



ROUGHING / CEMENTING

Speed setting for the rotation of the roughing brush/tool. Roughing brush following the three-dimensional traced path, with the possibility of quick brush change. Internal system for dust collection and motorization updated with software for the encoder reading.



ERGONOMIC SETTINGS

15" touchscreen monitor, in ergonomic position. Windows updated operating system, universal communication; data rescue system and updates by USB support.



REMOTE ASSISTANCE

Remote assistance by Teamviewer for a quick and immediate technical support. Easy updating of the machine software and easy identification of maintenance and processing problems.

TECHNICAL DATA

| MODELS | VOLTAGE (V) | MAX. ABSORPTION (kW) | AIR CONSUMPT. (NI/min) | NOISE EMISSION (dBA) | FREQUENCY (Hz) | SIZES (mm) | WEIGHT (Kg) |
|---------|--------------|----------------------|------------------------|----------------------|----------------|----------------|-------------|
| CD3 TS2 | 400 - 3Ph+PE | 6 | 40 | 71 | 50/60 | 1265x1825x2090 | 1150 |

Subject to change without notice - January 2018 edition

ATOM



ATOM MB

ATOM MB s.r.l. Viale Industria, 213/5 - 27029 Vigevano - PV - Italy - T +39 0381 345015 - info@atom-mb.it - www.atom-mb.it